

# Quick Start Guide for Casio Projectors

## Connecting Wirelessly and Exploring the Admin Panel 1.1

The following is needed for a USB wireless connection on your new Casio Projector.  
Casio USB Projector, Casio Network Connection Software, Casio YW-3 USB Dongle and Computer.




1. Download Casio Network Connection Software onto a Mac or PC

[Projectors - Downloads - Support - CASIO](#) 

2. Plug Black YW-40 USB Dongle into the USB port on the back of projector


3. Insert Power cord into projector and plug into and outlet

4. Press the Power Button. In a few seconds the Network Standby screen will appear  
Login Code appears at top left corner and the SSID/IP is on Bottom Left corner.

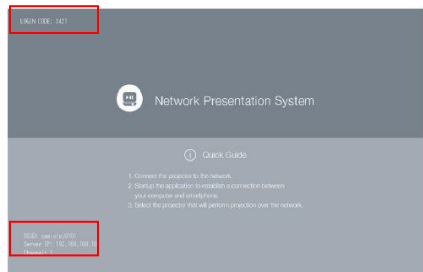

5. Turn on the devices Wifi and make sure it is not auto connecting to another wireless access point.

Connect to casiolpj0101 in the Wifi list. This is the default projectors SSID.


6. Open the Casio network connection program  It will begin searching for the connection



If connection not found check your settings and click reconnect.



Once connection is found this window appears. The User Name will auto populate then Enter Passphrase casioipj01 and re-enter it in the Confirm box.

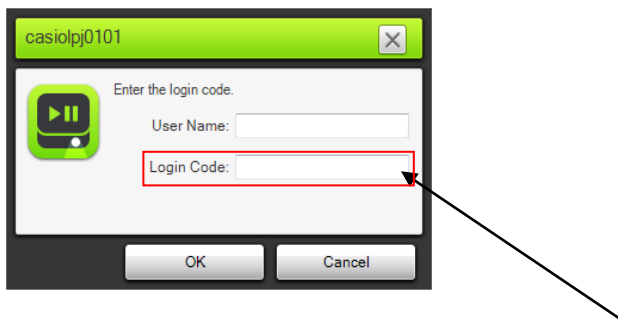

The User Name will auto populate then enter the **4 digit Login Code** from the top left of standby screen




You are now connected.


The program control window appears and your computer screen will be mirrored




## Program Features

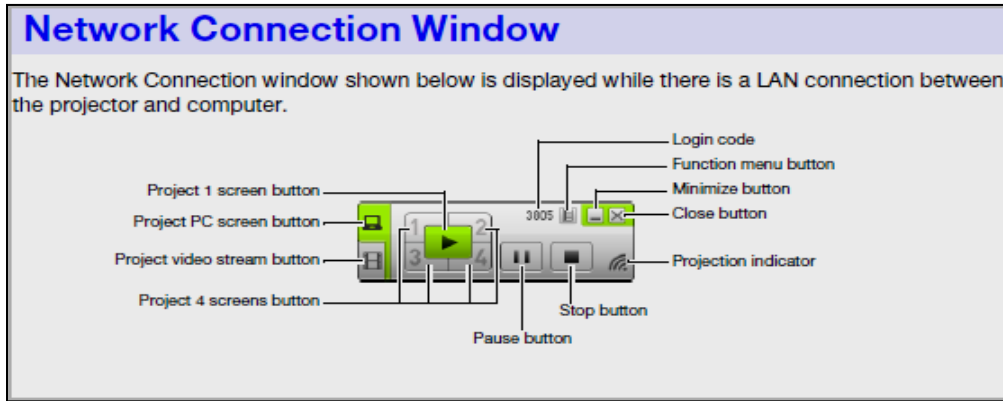

## 7. Logging in to Admin Screen

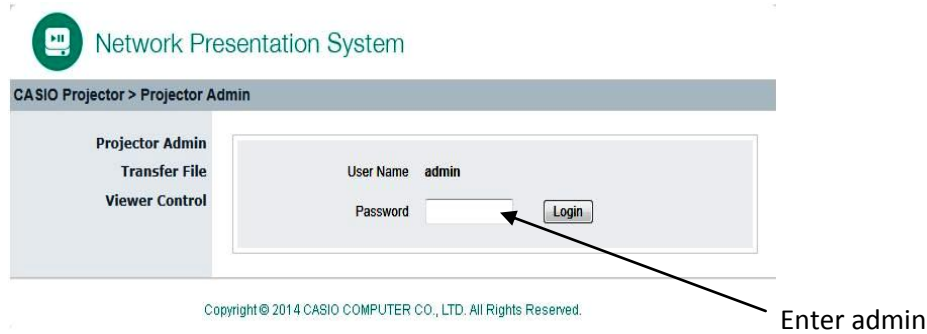

## Admin Panel Options

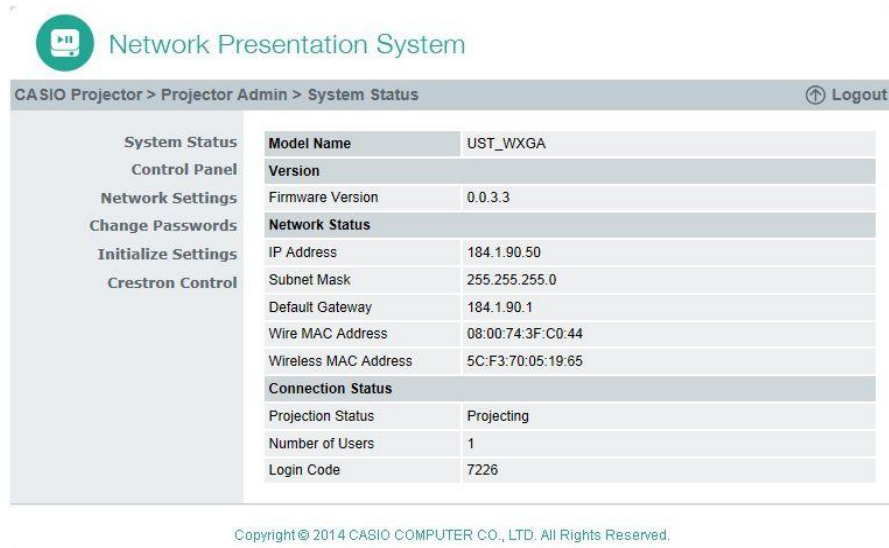

## Admin Panel

Explore all the options of the Admin Panel including connecting to an access point. For complete information please refer to the projectors Network Guide online at <http://support.casio.com/en/manual/manuallist.php?cid=007>

**System Status – View the Model, Firmware Version, Network Status and Connection Status**

**Control Panel – View Projector Status, Network Settings and Projector Control**

**Network Settings – View IP, DHCP, Wireless and External Access Point Settings**

**Change Passwords – Change Passwords for Admin and Transfer file**

**Initialize Settings – Reset all Projector settings to factory Default Settings**

**Crestron Control – Connect to a Crestron Control Panel**

For more information, manuals and downloads for your projector please go to the following links

[Projectors - Manuals - CASIO](#)

<http://support.casio.com/en/support/download.php?cid=007&pid=19>

